Axis S


ORXP-2006S

Patented design



CE CB IP65 IK09

Details



Base (optional)




Anchor bolt (optional)


Optics available




CCT	CRI	Power (W)	Luminaire output flux (lm)	Luminaire efficacy (lm/W)	Input voltage	Dimming
3000K	>80	12	852	71	AC 220-240V	ON/OFF

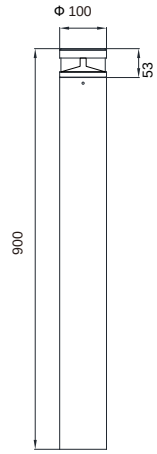

ORXP-2006S-90



ORXP-2006S-60



ORXP-2006S-40

Technical information

Parameter	Technical data	Parameter	Technical data
Insulation class	Class I	Screen	PC
Operating temperature	-20℃~50℃ / 10% ~ 95% (humidity)	Gasket	Silicone
Body parts material	Aluminum	Color stability	5 MacAdam steps
Light control	Optic / Diffuser	IP & IK Rating	IP65 & IK09

Packing Information

Model	Inner Carton Size (L*W*H)	QTY/ Inner Carton	N.W.(kg)	G.W.(kg)	Outer Carton Size (L*W*H)	QTY/ Outer Carton	N.W.(kg)	G.W.(kg)
ORXP-2006S-40	410*110*110mm	1	1.5	1.7	420*230*350mm	6	9.0	10.2
ORXP-2006S-60	610*110*110mm	1	1.9	2.1	620*230*350mm	6	11.4	12.6
ORXP-2006S-90	910*110*110mm	1	2.6	2.9	920*230*350mm	6	15.6	16.9

Lm: This data is tested under normal working condition, the actual data will depend on environment condition, optics/diffuser and CCT.