
Circa L

ORXBD-LED03S/D

Patented design

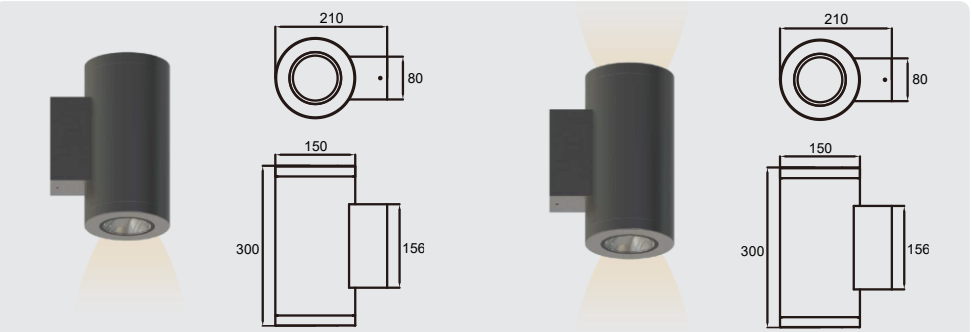

ORXBD-LED03S
Single Light

ORXBD-LED03S
Single Light

Details



Order

Model	CCT	CRI	Power (W)	Luminaire output flux (lm)	Luminaire efficacy (lm/W)	Input voltage	Dimming
ORXBD-LED03S	3000K	>80	20	1800	90	AC 220-240V	DALI
ORXBD-LED03S	3000K	>80	20	1800	90	AC 220-240V	ON/OFF
ORXBD-LED03D	3000K	>80	40	3600	90	AC 220-240V	DALI
ORXBD-LED03D	3000K	>80	40	3600	90	AC 220-240V	ON/OFF

Technical information

Parameter	Technical data	Parameter	Technical data
Insulation class	Class I	Screen	PC
Operating temperature	-20℃~50℃ / 10% ~ 95% (humidity)	Gasket	Silicone
Body parts material	Die cast Aluminum	Color stability	5 MacAdam steps
Light control	Optic / Diffuser	IP & IK Rating	IP65 & IK09

Packing Information

Model	Inner Carton Size (L*W*H)	QTY/ Inner Carton	N.W. (kg)	G.W. (kg)	Outer Carton Size (L*W*H)	QTY/ Outer Carton	N.W. (kg)	G.W. (kg)
ORXBD-LED03	160*160*310mm	1	3	3.2	530*270*190mm	8	16	16.8

Optics available



Lm: This data is tested under normal working condition, the actual data will depend on environment condition, optics/diffuser and CCT.