
Circa S

ORBD-LED02C


Patented design



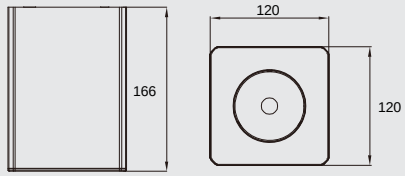

ORBD-LED02C
Ceiling light

Details

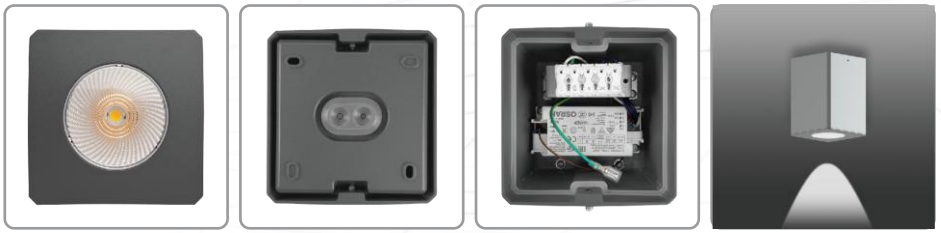

Circa Series Whole body made by die-casting aluminum, no gap between main body and base part.

Technical information

Parameter	Technical data	Parameter	Technical data
Insulation class	Class I	Screen	PC
Operating temperature	-20℃~50℃ / 10% ~ 95% (humidity)	Gasket	Silicone
Body parts material	Die cast Aluminum	Color stability	5 MacAdam steps
Light control	Optic / Diffuser	IP & IK Rating	IP65 & IK09

Order

Model	CCT	CRI	Power (W)	Luminaire output flux (lm)	Luminaire efficacy (lm/W)	Input voltage	Dimming
ORBD-LED02C	3000K	>80	15	1575	105	AC 220-240V	DALI
ORBD-LED02C	3000K	>80	15	1575	105	AC 220-240V	ON/OFF
ORBD-LED02C	3000K	>80	25	2500	100	AC 220-240V	DALI
ORBD-LED02C	3000K	>80	25	2500	100	AC 220-240V	ON/OFF

Packing Information

Model	Inner Carton Size (L*W*H)	QTY/ Inner Carton	N.W. (kg)	G.W. (kg)	Outer Carton Size (L*W*H)	QTY/ Outer Carton	N.W. (kg)	G.W. (kg)
ORBD-LED02C	130*130*180mm	1	2	2.1	530*270*190mm	8	16	16.8

Optics available



Lm: This data is tested under normal working condition, the actual data will depend on environment condition, optics/diffuser and CCT.