# Floris

## ORTGD-05


### FOUR SIZE

ORTGD-05A
Type A

ORTGD-05B
Type B

ORTGD-05C
Type C

ORTGD-05D
Type D

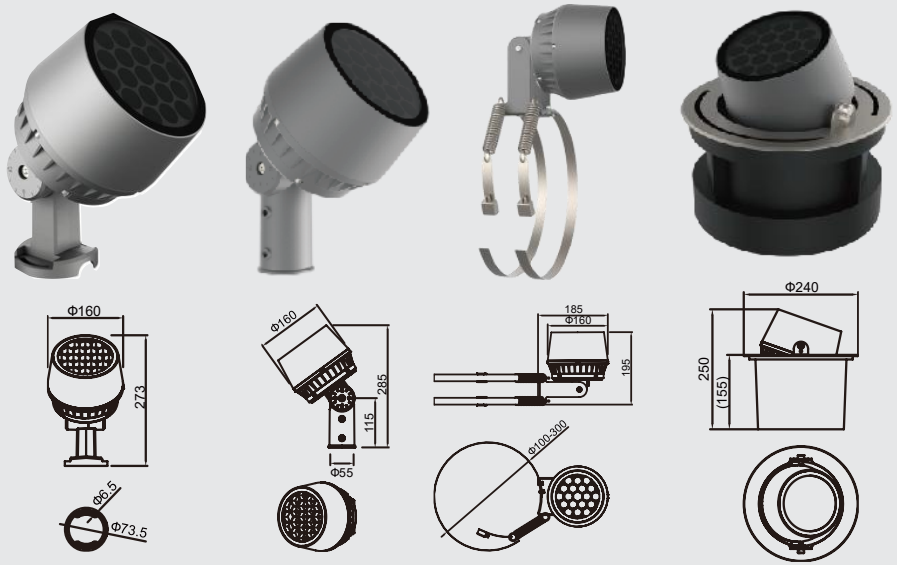


CE CB IP66 IK08

## Optics available




The circular light pipe can realize three light distribution, the optical fiber Angle is pure, the light spot is uniform, can meet a variety of light distribution requirements.

## Technical information

| Parameter | Technical data | Parameter | Technical data |
|---|---|---|---|
| Insulation class | Class I | Screen | PC |
| Operating temperature | -20°C~50°C / 10% ~ 95% (humidity) | Gasket | Silicone |
| Body parts material | Aerometal | Color stability | 5 MacAdam steps |
| Light control | Optic / Diffuser | IP & IK Rating | IP66 & IK08 |

## Order

| Model | CCT | CRI | Power (W) | Luminaire output flux (lm) | Luminaire efficacy ( lm / W) | Input voltage | Dimming |
|---|---|---|---|---|---|---|---|
| ORTGD-05A | 3000K | >80 | 18 | 1080 | 60 | AC100-277/DC24 | ON/OFF |
| ORTGD-05B | 3000K | >80 | 26 | 1560 | 60 | AC100-277/DC24 | ON/OFF |
| ORTGD-05C | 3000K | >80 | 36 | 2160 | 60 | AC100-277/DC24 | ON/OFF |
| ORTGD-05D | 3000K | >80 | 40 | 2400 | 60 | AC100-277/DC24 | ON/OFF |

## Packing Information

| Model | Carton Size (L*W*H) | QTY/ Carton | N.W. (kg) | G.W. (kg) | Outer Carton Size L*W*H | QTY / Outer Carton | N.W. (kg) | G.W. (kg) | 20FCL | 40FCL | 40H |
|---|---|---|---|---|---|---|---|---|---|---|---|
| ORTGD-05(01&02) | 212*212*305mm | 1 | 2.3 | 2.4 | / | / | / | / | 1820 | 3850 | 4780 |
| ORTGD-05(03&04) | 212*212*305mm | 1 | 2.4 | 2,5 | / | / | / | / | 1820 | 3850 | 4780 |