Hexa

ORTGD-06

FOUR SIZE

ORTGD-06A
Type A



ORTGD-06B
Type B




ORTGD-06C
Type C




ORTGD-06D
Type D



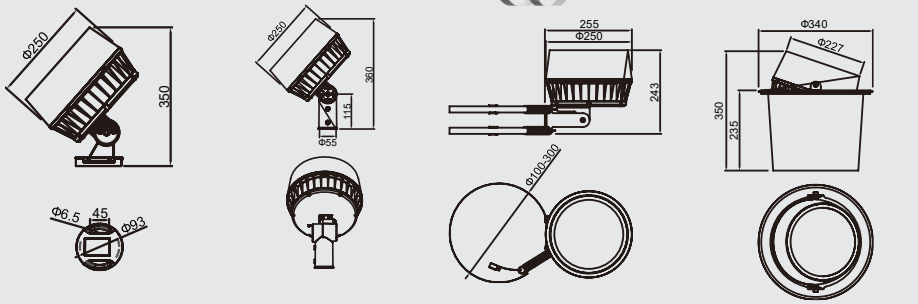

CE CB IP66 IK08

Optics available

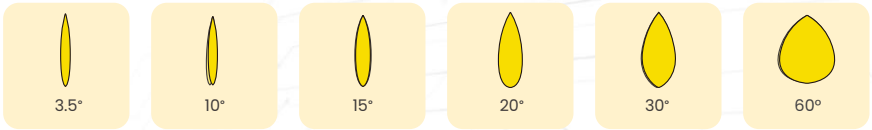

The circular light pipe can realize three light distribution, the optical fiber Angle is pure, the light spot is uniform, can meet a variety of light distribution requirements.

Technical information

Parameter	Technical data	Parameter	Technical data
Insulation class	Class I	Screen	PC
Operating temperature	-20°C~50°C / 10% ~ 95% (humidity)	Gasket	Silicone
Body parts material	Aerometal	Color stability	5 MacAdam steps
Light control	Optic / Diffuser	IP & IK Rating	IP66 & IK08

Order

Model	CCT	CRI	Power (W)	Luminaire output flux (lm)	Luminaire efficacy (lm / W)	Input voltage	Dimming
ORTGD-06A	3000K	>80	40	2400	60	AC100-277/DC24	ON/OFF
ORTGD-06B	3000K	>80	60	3600	60	AC100-277/DC24	ON/OFF
ORTGD-06C	3000K	>80	80	4800	60	AC100-277/DC24	ON/OFF
ORTGD-06D	3000K	>80	40	/	/	AC100-277/DC24	ON/OFF

Packing Information

Model	Carton Size (L*W*H)	QTY/ Carton	N.W. (kg)	G.W. (kg)	Outer Carton Size L*W*H	QTY / Outer Carton	N.W. (kg)	G.W. (kg)	20FCL	40FCL	40H
ORTGD-06(01)	300*300*450mm	1	3.6	3.7	/	/	/	/	588	1274	1638
ORTGD-06(02)	300*300*450mm	1	3.7	3.8	/	/	/	/	588	1274	1638
ORTGD-06(03&04)	300*300*450mm	1	3.8	3.9	/	/	/	/	588	1274	1638

Lm: This data is tested under normal working condition, the actual data will depend on environment condition, optics/diffuser and CCT.