DUO Spot

OX-SFM-005 SURFACE MOUNTED | LED SMD/GU10 | INTERNAL DRIVER



White

Black






Technical information

Parameter	Technical data
Optics Material	PC
Housing Material	Aluminum
Luminous Efficiency@4000K	Up to 97 lm/w
Glow wire test (°C)	750°C
Color Temperature(CCT)	1-CCT: 3000K/4000K/5000K/5700K


Details

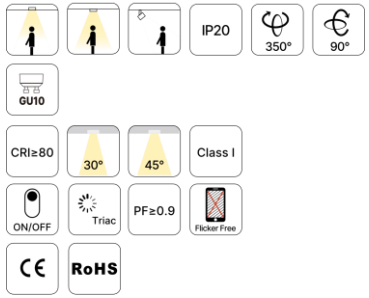


Maxima globe size

Please note that remove or install light fixtures after power off!

Caution, risk of Electric shock

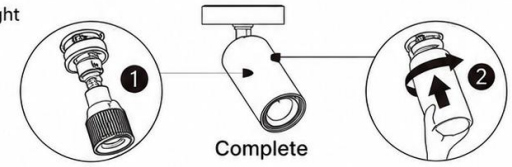

Code	Watt	Input Voltage(V)	Size (AxBmm)	Lumen (±5%)	N.W/pc (kgs)	Q'ty/ CTN
OX-SFM-005-2.5-8W	8W	AC200-240V	Ø57×96	68-83	780lm	0.37
OX-SFM-005-80-8W	8W	AC200-240V	Ø57×96×80	-	780lm	0.40
OX-SFM-005-260-16W	8W	AC200-240V	Ø57×96×260	-	1550lm	0.83
OX-SFM-005-430-24W	2×8W	AC200-240V	Ø57×96×430	-	2350lm	1.29
OX-SFM-005-8W	3×8W	AC200-240V	Ø57×96×85	-	780lm	1.50

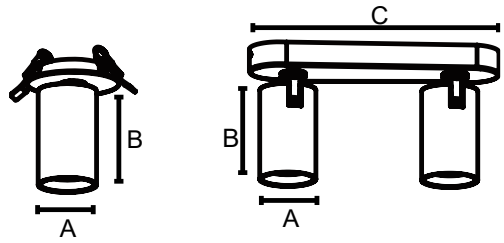

Accessories




White ACC-OX-SFM-005

Black ACC-OX-SFM-005

Golden ACC-OX-SFM-005

ACC-OX-SFM-005-2.5

GU10 socket parameter



Input Voltage	AC100-240V
Max Input Current	2A
Max Watt	16W
Max Dimension (AxBmm)	Ø50x60 / Ø50x86