
GRID Guard

OX-BHD-007


BULKHEAD | LED SMD | INTERNAL DRIVER

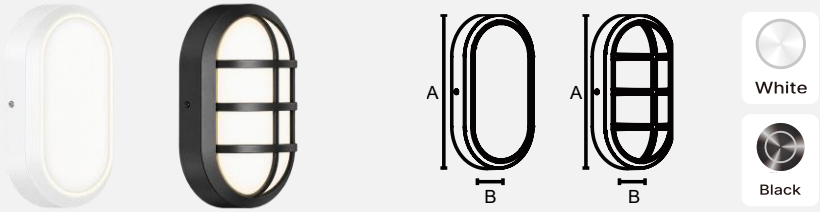

Technical information

Parameter	Technical data
Optics Material	PC
Housing Material	PC+ABS
Luminous Efficiency@4000K	Up to 120 lm/w
Glow wire test (°C)	850°C
Color Temperature(CCT)	1-CCT: 3000K/4000K/5000K/5700K 3-CCT: 3000K+4000K+5700K

Details



Code	Watt	Input Voltage(V)	Size (AxBmm)	Lumen (±5%)	N.W (kgs)	Q'ty/ CTN
OX-BHD-007-8-5W	5W	AC200-240V	220×120×66 (Plain)	600lm	0.40	30PCS
OX-BHD-007-8-10W	10W	AC200-240V	220×120×69 (Grilled)	1100lm	0.40	30PCS
OX-BHD-007-8-5W-S1	5W	AC200-240V	220×120×66	500lm	0.40	30PCS
OX-BHD-007-8-10W-S1	10W	AC200-240V	220×120×69	900lm	0.40	30PCS

Accessories



DIY Design

OX-BHD-007



