
VISION Core FIRE-RATED

OX-RDL-028


DOWNLIGHT | LED SMD | INTERNAL DRIVER

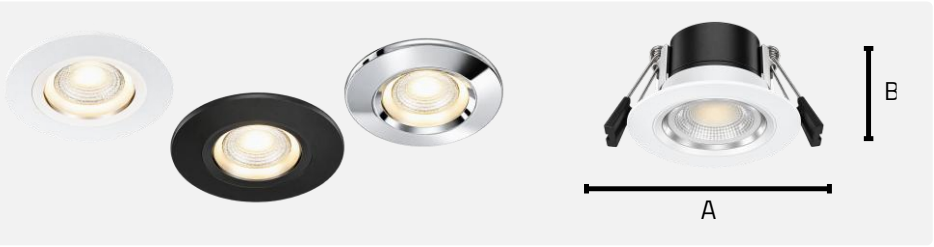

Technical information

Parameter	Technical data
Optics Material	PC
Housing Material	SPCC
Luminous Efficiency@4000K	Up to 135 lm/w
Glow wire test (°C)	750°C
Color Temperature(CCT)	3-CCT: 3000K+4000K+5700K

Details

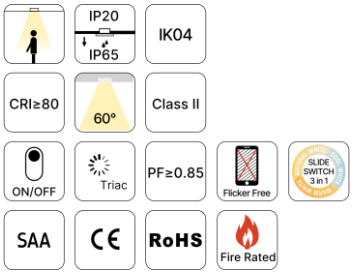

Code	Watt	Input Voltage(V)	Size (AxBmm)	Cut-out(mm)	Lumen (±5%)	N.W/pc (kgs)	Q'ty/ CTN
OX-RDL-028-2.5-6W	6W	AC220–240V	Ø85×45	Ø60–70	800lm	0.15	48PCS

Accessories



Available Color

