Linear

ORXCP-2102/2103

Patented design




CE IP65 IK09


Technical information

Parameter	Technical data	Parameter	Technical data
Insulation class	Class I	Screen	PC
Operating temperature	-20℃~50℃ / 10% ~ 95% (humidity)	Gasket	Silicone
Body parts material	Aluminum	Color stability	5 MacAdam steps
Light control	Optic	IP & IK Rating	IP65 & IK09

Details









Option : ORXCP-2102R-Version for suitable E27 A60 LED Lamps, up to 15W

Optics available




- Designed, manufactured and tested according to IEC60598
- Diecast aluminum and extruded aluminum body.
- Stainless steel screws with special treatment for anti-corration
- Double layer coating for 500hrs salt spray testing
- Polycarbonate protective cover with IK09
- Post cured silicon gaskets
- Pre-wired in factory as option

Head

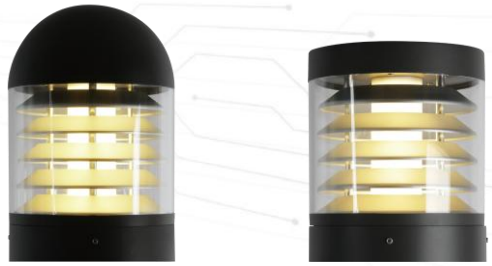

Chip	CCT	CRI	Power (W)	Luminaire output flux (lm)	Luminaire efficacy (lm/W)	Input voltage	Dimming
3030	3000K	>80	12	600	50	AC 220-240V	ON/OFF
3030	3000K	>80	25	1250	50	AC 220-240V	ON/OFF

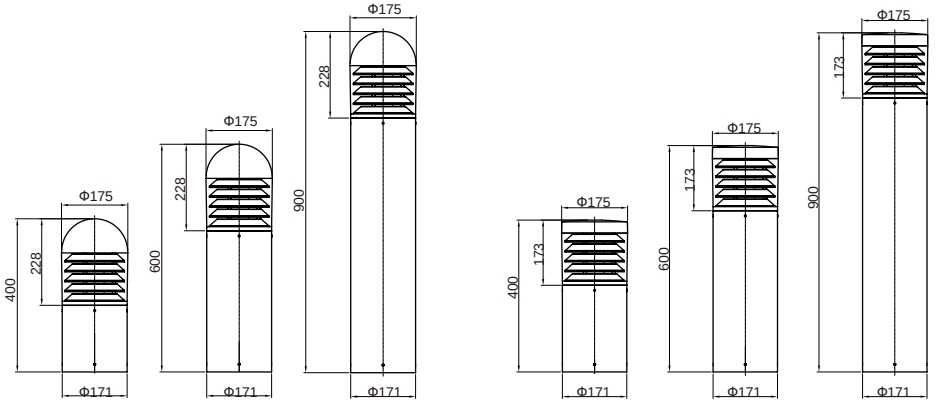

ORXCP-2102-400 ORXCP-2102-600 ORXCP-2102-900 ORXCP-2103-400 ORXCP-2103-600 ORXCP-2103-900

Lm: This data is tested under normal working condition, the actual data will depend on environment condition, optics/diffuser and CCT.