
Lumera E

ORT-LED95E

Patented design

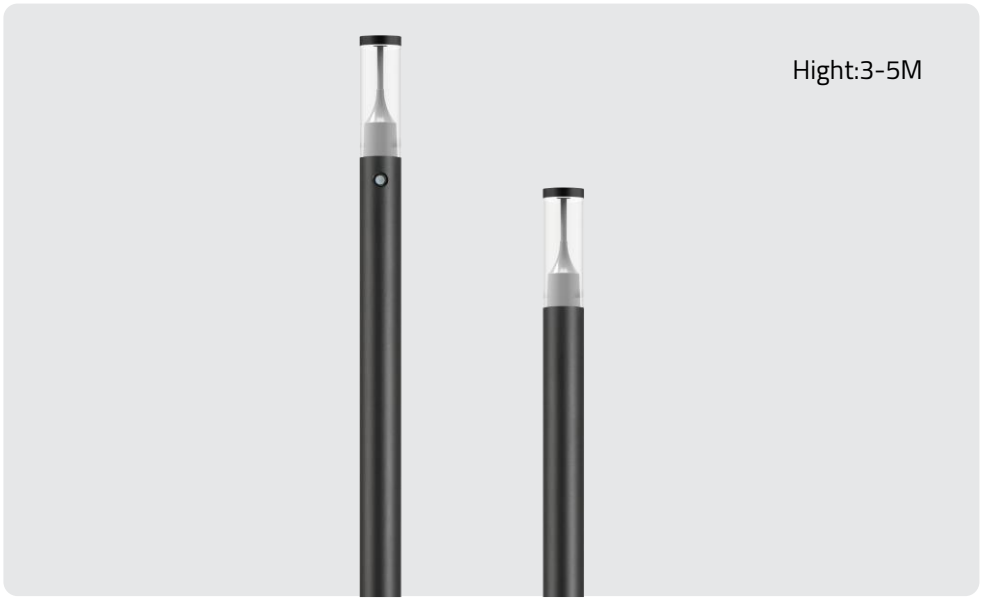


Parking lot Village Park Road

Optics available



5050	G11C36-T2	C12C36-T5
36*1		



Chip	LED QTY	Lens QTY	Power (W)	Luminaire output flux (lm)	Luminaire efficacy (lm/W)
5050	24	1	30	3900	130
5050	30	1	40	5200	130
5050	36	1	50	6500	130

Base




Optional Accessories

Light bar for Bollard

Light bar for Bollard



Code.20014001

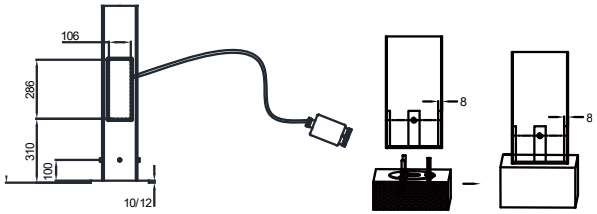

CE CB IP65 IK08

Technical information

Parameter	Technical data	Parameter	Technical data
Lifetime	Up to 100,000hrs LM70,Ta 25℃	Driver isolation	Class I or Class II
Wattages	30~50W	Control dimming	DALI / 1-10V / Timing / PWM
Light efficacy	Up to 130lm/W	Operating temperature	-35℃~50℃ / 10% ~ 95% (humidity)
CRI	≥ 70 or ≥ 80	Body parts material	Die cast Aluminum
Color temperature	3000K, 4000K, Amber color	Optic	PC (standard)
Operation voltage	AC 90-305V or AC 220-240V	Screen	PC
Frequency	50 / 60Hz	Gasket	Silicone
Power factor	≥0.95 cos	Color stability	3 or 5 MacAdam steps

5050: LUMILEDS 5050; 3535: CREE XPG3; 3030: LUMILEDS 3030

Lm: This data is tested under normal working condition, the actual data will depend on environment condition, optics/diffuser and CCT.