
Nexus G

ORXDM-01

Patented design



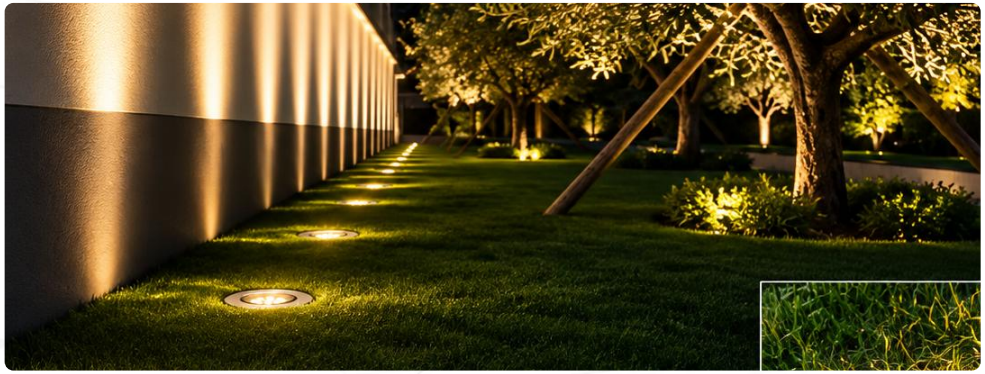

CE CB IP67 IK10

Technical information

Parameter	Technical data	Parameter	Technical data
Insulation class	Class I	Screen	PC
Operating temperature	-20°C~50°C / 10% ~ 95% (humidity)	Gasket	Silicone
Body parts material	Aero metal	Color stability	5 MacAdam steps
Light control	Optic / Diffuser	IP & IK Rating	IP67 & IK10

Order

Model	CCT	CRI	Power (W)	N.W (kg)	Packing Information	Input voltage
ORXDM-011	3000K	>80	1*3W/3W COB	0.85	55.5*34*26cm/30pcs	12V/24V/240V
ORXDM-012	3000K	>80	1*3W/3W COB	1.4	53*36*38cm/10pcs	12V/24V/240V
ORXDM-013	3000K	>80	3*2W/5W COB	1.8	49*33*37cm/12pcs	12V/24V/240V
ORXDM-014	3000K	>80	9*2W/10W COB	3	48*48*26cm/4pcs	12V/24V/240V
ORXDM-015	3000K	>80	12*2W/20W COB	4.6	53*53*31cm/4pcs	12V/24V/240V
ORXDM-016	3000K	>80	15*2W/20W COB	5	57*30*31cm/2pcs	12V/24V/240V
ORXDM-017	3000K	>80	18*2W/30W COB	7.25	64*33*33cm/2pcs	12V/24V/240V
ORXDM-018	3000K	>80	24*2W/50W COB	10.1	37.5*37.5*40.5cm/1pcs	12V/24V/240V

Optics available



Details






Lm: This data is tested under normal working condition, the actual data will depend on environment condition, optics/diffuser and CCT.


Nexus G

ORXDM-01


Dimensions




ORXDM-011




ORXDM-012




ORXDM-013




ORXDM-014

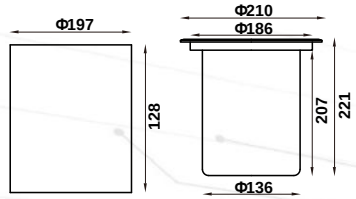


ORXDM-015

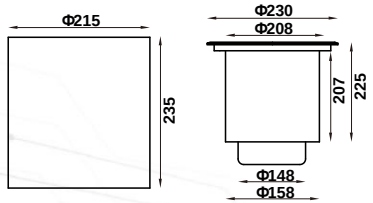


ORXDM-016

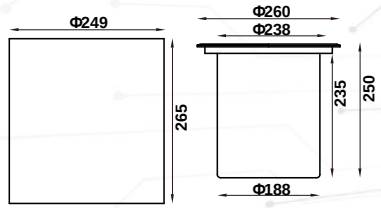

ORXDM-017

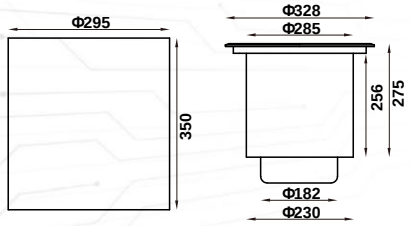

ORXDM-018

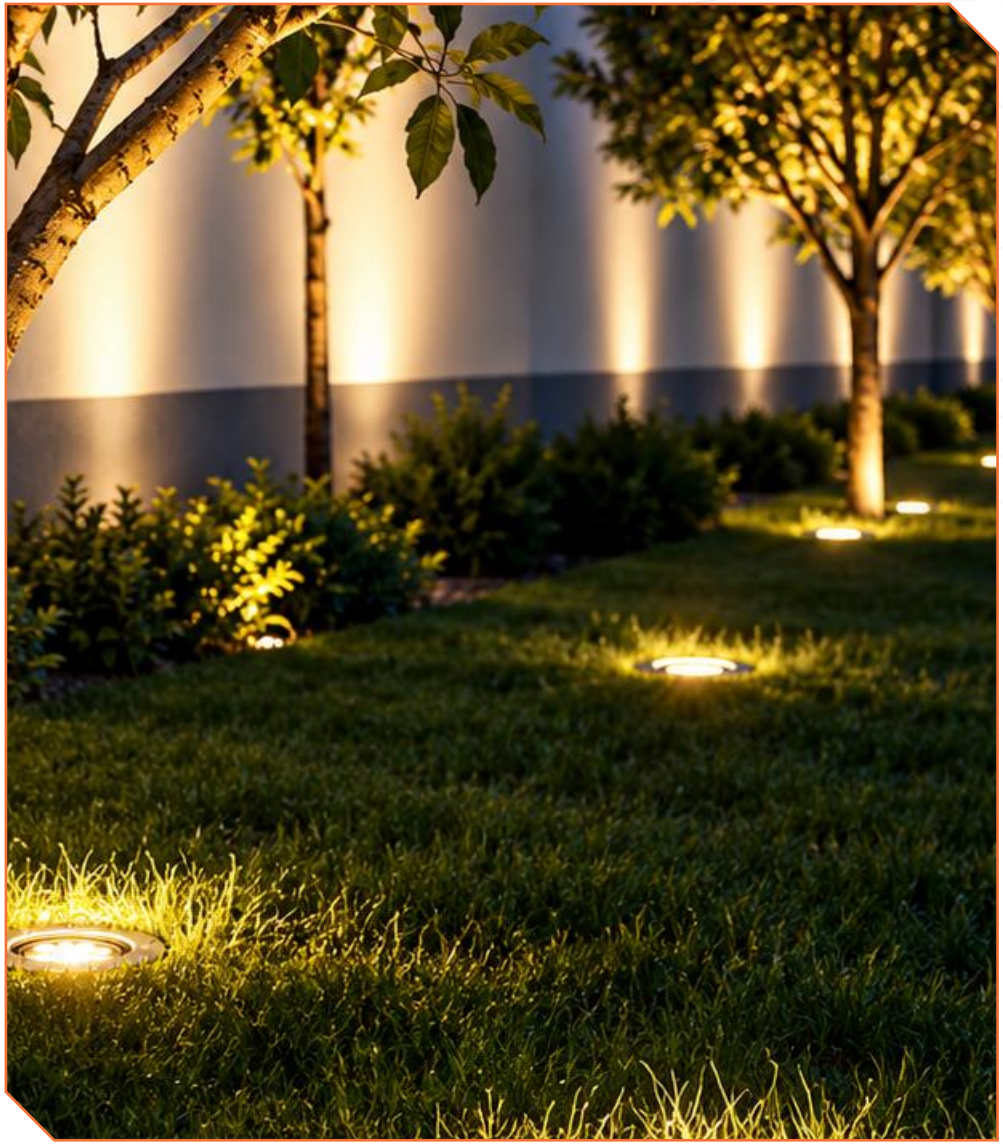

Lm: This data is tested under normal working condition, the actual data will depend on environment condition, optics/diffuser and CCT.