Orven

ORS-LED10BS


Patented design

Parking lot Village Park Road

Optics available





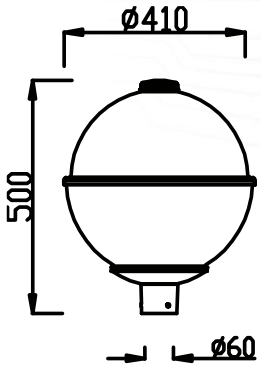

ORS-LED93

Chip	LED QTY	Lens QTY	Power (W)	Luminaire output flux (lm)	Luminaire efficacy (lm/W)
5050	30	5	20	2400	120
5050	30	5	30	3600	120
5050	30	5	40	4800	120
5050	30	5	50	6000	120




CE CB IP65 IK09

Technical information

Parameter	Technical data	Parameter	Technical data
Lifetime	Up to 100,000hrs LM70,Ta 25°C	Driver isolation	Class I
Wattages	20~50W	Control dimming	DALI / 1-10V / Timing / PWM
Light efficacy	Up to 120 lm/W	Operating temperature	-35°C~50°C / 10% ~ 95% (humidity)
CRI	≥ 70 or ≥ 80	Body parts material	Die cast Aluminum
Color temperature	3000K, 4000K, Amber color	Optic	PC (standard) / PMMA (option)
Operation voltage	AC 90-305V or AC 220-240V	Cover	PC
Frequency	50 / 60Hz	Gasket	Silicone
Power factor	≥0.95 cos	Color stability	3 or 5 MacAdam steps

Packing Information

Model	Carton Size (L*W*H)	QTY/Carton	N.W.(kg)	G.W.(kg)
ORS-LED93	490*490*570mm	1	7.2	8.0



5050: LUMILEDS 5050; 3535: CREE XPG3; 3030: LUMILEDS 3030
Lm: This data is tested under normal working condition, the actual data will depend on environment condition, optics/diffuser and CCT.