Vanta S

ORXP-2008S

Parking lot Village Park Road

All-New Upgraded Vanta S | Enhanced Protection, Smart Compatibility, Versatile Beam Angles

Reinforced PC cover over the optical lens for extra durability, integrated waterproof junction box for reliable outdoor use, full compatibility with DALI drivers, and flexible 180° & 360° beam angle options to fit any landscape lighting project.





180° (LED QTY: 5)



360° (LED QTY: 6)



Waterproof junction box

ORXP-2008S

Patented design





180° (LED QTY: 5)

CE CB IP65 IK09


Technical information

Parameter	Technical data	Parameter	Technical data
Insulation class	Class I	Screen	PC
Operating temperature	-20°C~50°C / 10% ~ 95% (humidity)	Gasket	Silicone
Body parts material	Aluminum	Color stability	5 MacAdam steps
Light control	Optic / Diffuser	IP & IK Rating	IP65 & IK09



180° (LED QTY: 5)

Details



Base (optional)



Anchor bolt (optional)


Optics available



Vanta S

ORXP-2008S

Parking lot Village Park Road

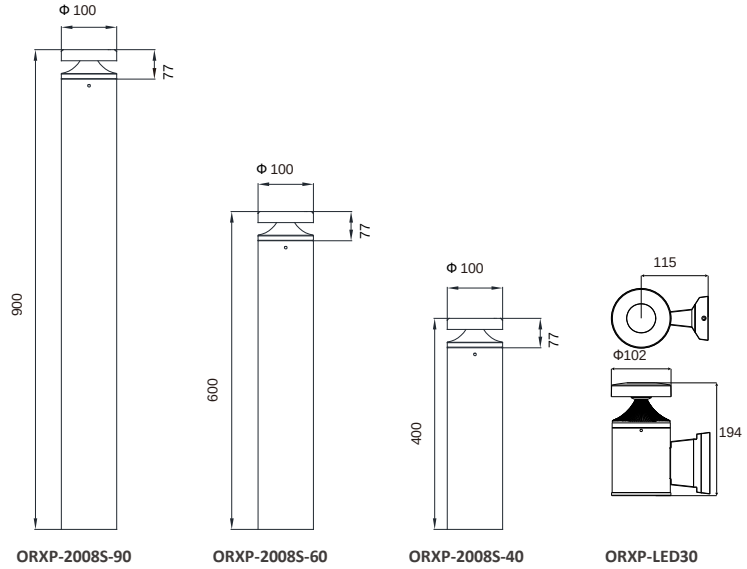

ORXP-2008S-90 ORXP-2008S-60 ORXP-2008S-40 ORXP-LED30



CCT	CRI	Power (W)	Luminaire output flux (lm)	Luminaire efficacy (lm/W)	Input voltage	Dimming
3000K	>80	12	780	65	AC 220-240V	ON/OFF

Packing Information

Model	Carton Size (L*W*H)	QTY/ Inner Carton	N.W.(kg)	G.W.(kg)	Outer Carton Size (L*W*H)	QTY/ Outer Carton	N.W.(kg)	G.W.(kg)
ORXP-2008S-40	410*110*110mm	1	2	2.1	420*340*230mm	6	12	12.6
ORXP-2008S-60	610*110*110mm	1	2.5	2.65	620*340*230mm	6	15	15.9
ORXP-2008S-90	910*110*110mm	1	3	3.2	920*340*230mm	6	18	20.3
ORXP-LED30	185*115*275mm	1	1.2	1.5	475*385*240mm	8	9.6	13.0

Lm: This data is tested under normal working condition, the actual data will depend on environment condition, optics/diffuser and CCT.