Vector G

ORXCP-2000

Patented design



IP65 IK09

Technical information

Parameter	Technical data	Parameter	Technical data
Insulation class	Class I	Screen	PC
Operating temperature	-20°C~50°C / 10% ~ 95% (humidity)	Gasket	Silicone
Body parts material	Aluminum	Color stability	5 MacAdam steps
Light control	Optic / Diffuser	IP & IK Rating	IP65 & IK09

Packing Information

Model	Outer Carton Size (L*W*H)	QTY/ Outer Carton	N.W.(kg)	G.W.(kg)
ORXCP-2000-40	420*225*240mm	1	3.8	4.5
ORXCP-2000-60	620*225*240mm	1	4.2	4.9
ORXCP-2000-90	920*225*240mm	1	4.8	5.6

Details



Base (optional)



Anchor bolt (optional)



Installation 2(Optional)





Vector G
ORXCP-2000



Vega
ORXCP-LED27A

Bollard with and without sensors: combinable and groupable - light only on the path sections where it is needed.
Minimized light pollution: light only where it should and only when it is needed: through asymmetric light distribution and PIR sensors.
Warm white light - with 3,000K, the Novar series luminaires are particularly insect-friendly.
Easy to assemble, flexible in fixing: thanks to elongated holes, flexible in attachment even with imprecise screw-on points and easy and precise to align. Save energy, reduce costs, protect the climate: keep costs low in the long term and protect the environment through high efficiency and a long service life.

Optics available



C12C36-T5




Lm: This data is tested under normal working condition, the actual data will depend on environment condition, optics/diffuser and CCT.

Vector G


ORXCP-2000






ORXCP-2000-4

CCT	CRI	Power (W)	Luminaire output flux (lm)	Luminaire efficacy (lm/W)	Input voltage	Dimming
3000K	>80	12	1200	100	AC 220-240V	ON/OFF
3000K	>80	24	2400	100	AC 220-240V	ON/OFF



ORXCP-2000-6

CCT	CRI	Power (W)	Luminaire output flux (lm)	Luminaire efficacy (lm/W)	Input voltage	Dimming
3000K	>80	12	1200	100	AC 220-240V	ON/OFF
3000K	>80	24	2400	100	AC 220-240V	ON/OFF

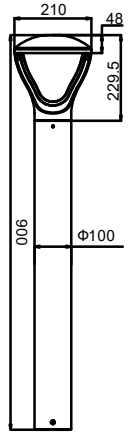

ORXCP-2000-9

CCT	CRI	Power (W)	Luminaire output flux (lm)	Luminaire efficacy (lm/W)	Input voltage	Dimming
3000K	>80	12	1200	100	AC 220-240V	ON/OFF
3000K	>80	24	2400	100	AC 220-240V	ON/OFF

Lm: This data is tested under normal working condition, the actual data will depend on environment condition, optics/diffuser and CCT.