Verra A

ORS-LED97A

Patented design

Parking lot Village Park Road



CE CB IP65 IK08

Details




ORS-LED97M


Optics available




Technical information

Parameter	Technical data	Parameter	Technical data
Lifetime	Up to 100,000hrs LM70,Ta 25°C	Driver isolation	Class I or Class II
Wattages	20~80W	Control dimming	DALI / 1-10V / Timing / PWM
Light efficacy	Up to 147lm/W	Operating temperature	-35°C~50°C / 10% ~ 95% (humidity)
CRI	≥ 70 or ≥ 80	Body parts material	Die cast Aluminum + Extrusion Aluminum
Color temperature	3000K, 4000K, Amber color	Optic	PC (standard) / PMMA (option)
Operation voltage	AC 90-305V or AC 220-240V	Screen	Tempered glass
Frequency	50 / 60Hz	Gasket	Silicone
Power factor	≥0.95 cos	Color stability	3 or 5 MacAdam steps

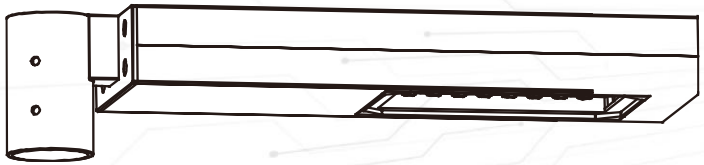




ORS-LED97A-660

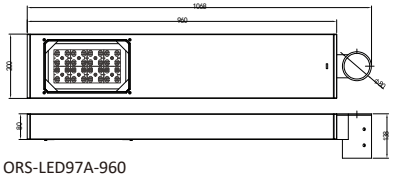

ORS-LED97A-960

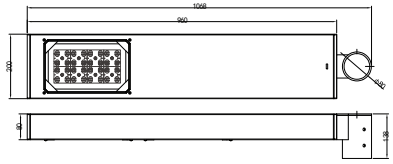

ORS-LED97AM-960

Chip	LED QTY	Lens QTY	Power (W)	Luminaire output flux (lm)	Luminaire efficacy (lm/W)
5050	16	4	20	2940	147
5050	16	4	40	5640	141
5050	24	6	60	8460	141
5050	24	6	80	11200	140

5050: LUMILEDS 5050; 3535: CREE XPG3; 3030: LUMILEDS 3030
Lm: This data is tested under normal working condition, the actual data will depend on environment condition, optics/diffuser and CCT.