Volt

ORGKD-LED03 Series

Parking lot Village Park Road

Options



HV+PC Lampshade



HV Lampshade







HV+Bracket




DOB Versions

Mounting options



Install to fixed surface



Ceiling mounted



Wall mounted

Mounting Accessories



Safety chain



180 Deg bracket



Suspended hook

Details





2835: LUMILEDS 2835
Lm: This data is tested under normal working condition, the actual data will depend on environment condition, optics/diffuser and CCT.

Flex

Parking lot Village Park Road

ORGKD-LED03 Series

Patented design

FOUR SIZE

100~240W



CE IP65 IK09

Optics available

3030/2835	90°

Packing Information


Model	Inner Carton Size (L*W*H)	QTY/ Inner Carton	N.W. (kg)	G.W. (kg)	Outer Carton Size L*W*H	QTY / Outer Carton	N.W. (kg)	G.W. (kg)
ORGKD-LED03S	240*240*115mm	1	1.3	1.5	610*255*260mm	10	/	15.6
ORGKD-LED03M	270*270*120mm	1	1.6	2.0	630*285*290mm	10	/	20.8
ORGKD-LED03L	315*315*120mm	1	1.7	/	630*330*335mm	5	/	12.7
ORGKD-LED03XL	355*355*130mm	1	2.3	/	660*370*375mm	5	/	17.3

Technical information

Parameter	Technical data	Parameter	Technical data
Lifetime	Up to 100,000hrs LM70,Ta 25°C	Driver isolation	Class I
Wattages	100~240W	Control dimming	0-10V / Timing / PWM
Light efficacy	Up to 160lm/W	Operating temperature	-35°C~50°C / 10% ~ 95% (humidity)
CRI	≥ 70 or ≥ 80	Body parts material	Die cast Aluminum
Color temperature	3000K, 4000K, 6000K	Optic	PC (standard)
Operation voltage	AC 180-265V / AC 100-277V	Screen	PC
Frequency	50 / 60Hz	Gasket	Silicone
Power factor	≥0.95 cos	Color stability	3 or 5 MacAdam steps

Model	Chip	LED QTY	Lens QTY	Power (W)	Luminaire output flux (lm)	Luminaire efficacy (lm/W)
ORGKD-LED03S	3030/2835	168	1	100	16000	160
ORGKD-LED03M	3030/2835	240	1	150	24000	160
ORGKD-LED03L	3030/2835	336	1	200	32000	160
ORGKD-LED03XL	3030/2835	456	1	240	38400	160

Dimensions

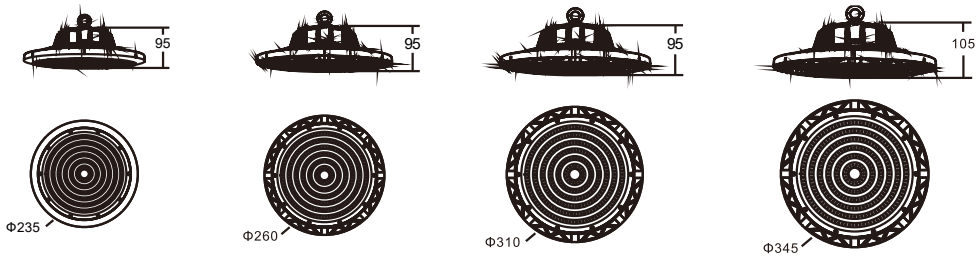

OYGKD-LED03S OYGKD-LED03M OYGKD-LED03L OYGKD-LED03XL

2835: LUMILEDS 2835
Lm: This data is tested under normal working condition, the actual data will depend on environment condition, optics/diffuser and CCT.